
Памятка по расширенным настройкам сканирования в АРМ

Применение в АРМ расширенных настроек сканера необходимо, если не удается добиться необходимого качества сканирования.


1 Установка расширенных настроек сканера

Для включения расширенных настроек используемого сканера:

1. В окне «**Настройка сканирования**» выберите сканер и нажмите ссылку «Расширенные настройки сканера».

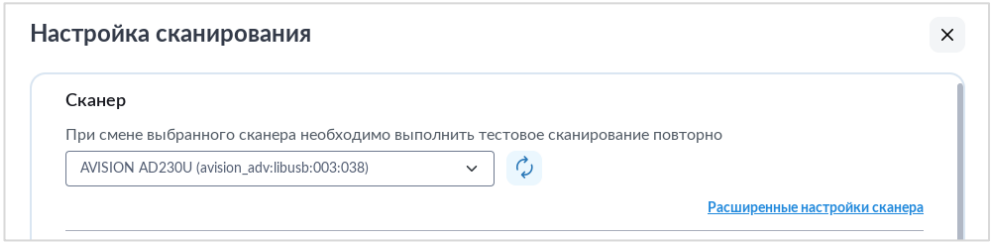

2. Скорректируйте предустановленные параметры, при их наличии, или нажмите «**Добавить параметр**» и в появившимся поле введите новое наименование параметра и его значение в соответствии со списком доступных параметров.

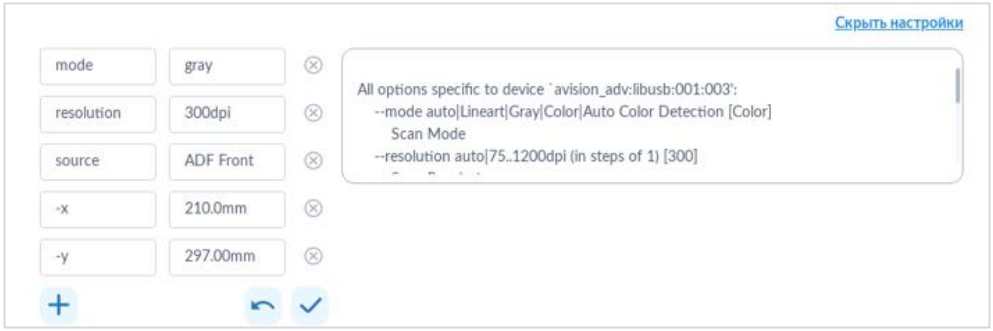

Важно! *К наименованию параметра, если перед ним ничего не указано, ПО автоматически подставляет «--», если в перечне параметров указано, что перед параметром должно быть «-», то надо его указать в поле ввода наименования параметра, тогда «--» автоматически не подставится.*

Важно! *При использовании расширенных настроек обязательно должны быть указаны параметры отвечающие за разрешение сканирования в 300dpi и сканирование в оттенках серого.*

3. При необходимости удалите параметр с помощью кнопки «**Удалить**» напротив соответствующего параметра.
4. Произведите сканирование тестовой страницы, нажав кнопку «**Отсканировать**».


   В результате будет выполнено сканирование тестовой страницы с примененными параметрами и распознавание напечатанных на ней штрих-кодов и QR-кода, изображение отсканированной страницы появится в окне «**Настройка сканирования**».

Важно! *В случае неверно указанных параметров сканирования при нажатии кнопку «Отсканировать» сканирование может не производиться, в данном случае необходимо скорректировать расширенные настройки сканера (параметр или значение).*

5. Если замечания к качеству отсканированного изображения отсутствуют, штрих-код и QR-код успешно распознаны, то нажмите «**Применить**».

   В результате пользовательские настройки сканера будут сохранены и автоматически применены при следующем сканировании.
6. Если к качеству отсканированного изображения есть замечания, то произведите корректировку расширенных настроек сканера.
7. После сканирования тестовой страницы, замечания к качеству которой отсутствуют, штрих-код и QR-код успешно распознаны, пользовательские настройки сохранены, в окне «**Настройка сканирования**» нажмите «**Да**».

   В результате кнопка «**Сохранить**» станет доступна для нажатия.
8. Для сохранения выбранного сканера и сведений о проверке сканирования нажмите «**Сохранить**».

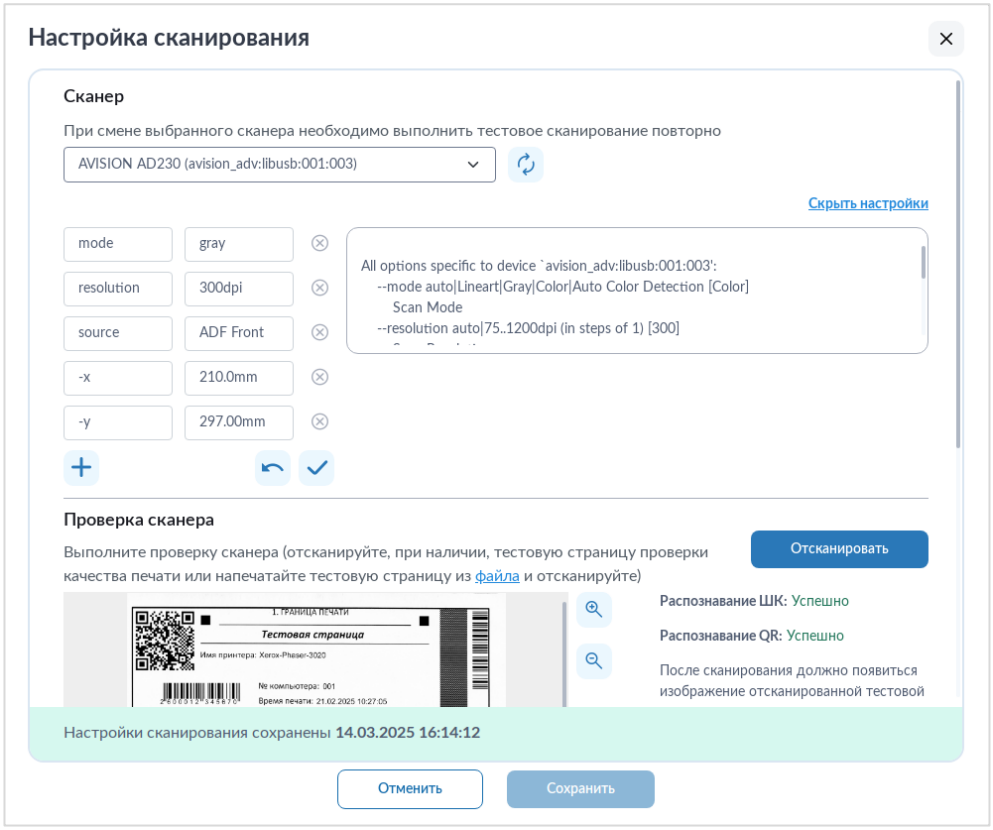

Важно! *Отсканированное изображение должно соответствовать:*

- ✓ *Размер:* ***А4 (210мм на 297мм).***
- ✓ *Разрешение сканирования:* ***300 точек на дюй****м.*
- ✓ *Цветность сканирования:* ***оттенки серого.***

Пользовательские настройки будут применены на всех этапах подготовки и проведения экзаменов.

*Для удаления ранее сохраненных пользовательских настроек используйте кнопку «****Удалить пользовательские настройки****».*

Сведения о производителе, модели и параметрах расширенных настроек, предустановленных в АРМ, приведены в **Приложении**.

Важно! *В случае недостаточно качественного сканирования с предустановленными расширенными настройками удалите их на странице «Настройка сканирования» и выполните настройку самостоятельно в соответствии с данной инструкцией.*

Приложение. Библиотека расширенных настроек, предустановленных в АРМ

Производитель	Модель	Параметры и значения
Avision	AD120	mode: gray resolution: 300dpi source: ADF Front -x: 210 -y: 297
Avision	AD130	mode: gray resolution: 300dpi source: ADF Front -x: 210 -y: 297
Avision	AD230	mode: gray resolution: 300dpi source: ADF Front -x: 210 -y: 297
Avision	AD230U	mode: gray resolution: 300dpi source: ADF Front -x: 210 -y: 297
Avision	AD240	mode: gray resolution: 300dpi source: ADF Front -x: 210 -y: 297
Avision	AD240U	mode: gray resolution: 300dpi source: ADF Front -x: 210 -y: 297
Avision	AD240U+	mode: gray resolution: 300dpi source: ADF Front -x: 210.0mm -y: 297.0mm
Avision	AD332	mode: gray resolution: 300dpi source: ADF Front -x: 210 -y: 297
Avision	AD332U	mode: gray resolution: 300dpi source: ADF Front -x: 210 -y: 297
Avision	AD340GN	mode: Gray resolution: 300dpi source: ADF Front -x: 210 -y: 297
Avision	AD345GL	mode: gray resolution: 300dpi source: ADF Front
Avision	AD345GN	mode: gray resolution: 300dpi source: ADF Front
Avision	AD345GWN	mode: gray resolution: 300dpi source: ADF Front
Brother	ADS-2400N	mode: gray resolution: 300dpi -x: 210 -y: 297
Brother	ADS-2800W	mode: true gray resolution: 300dpi source: Automatic Document Feeder(left aligned) -x: 210.0mm -y: 297.0mm
Brother	DCP-2540DN	resolution: 300dpi -x: 210.0mm -y: 297.0mm
Brother	DCP-2551DN	mode: gray resolution: 300dpi source: ADF -x: 210.0mm -y: 297.0mm
Brother	DCP-L2500D	resolution: 300dpi source: FlatBed -x: 210 -y: 297
Brother	DCP-L5500DN	resolution: 300dpi source: ADF -x: 210.0mm -y: 297.0mm
Brother	MFC-L2700DN	mode: True gray resolution: 300dpi source: ADF -x: 210 -y: 297
Brother	MFC-L2700DW	mode: true gray resolution: 300dpi source: Automatic Document Feeder(centrally aligned) -x: 210.0mm -y: 297.0mm
Canon	DR-2010C	mode: Gray resolution: 300 source: ADF Front page-width: 210 page-height: 297
Canon	DR-C130	mode: gray resolution: 300dpi page-width: 210 page-height: 297
Canon	DR-C225	mode: Black & White resolution: 300dpi Size: A4
Canon	DR-C230	mode: gray resolution: 300dpi deskew: yes Size: A4
Canon	DR-C240	mode: gray resolution: 300dpi deskew: yes Size: A4

Памятка по расширенным настройкам сканирования в АРМ

Производитель	Модель	Параметры и значения
Canon	DR-M140	mode: Gray resolution: 300dpi swdeskew: yes page-height: 300
Canon	DR-M160	mode: Gray resolution: 300dpi swdeskew: yes page-height: 300
Canon	DR-M260	mode: gray resolution: 300dpi Deskew: yes
Canon	imageRUNNER 1133A	mode: gray resolution: 300dpi source: Automatic Document Feeder
Canon	i-SENSYS MF230	resolution: 300dpi
Canon	i-SENSYS MF420	mode: gray resolution: 300dpi source: ADF -x: 210.0mm -y: 297.0mm
Canon	i-SENSYS MF440	mode: Gray resolution: 300dpi source: ADF -x: 210 -y: 297
Canon	MF460	mode: Gray resolution: 300dpi source: ADF -x: 210 -y: 297
Canon	P215-II	mode: gray resolution: 300 -l: 0 -t: 0 -x: 210 -y: 297
Epson	DS-1630	mode: gray resolution: 300dpi source: ADF Front -x: 210.0mm -y: 297.0mm
Epson	DS-310	mode: gray resolution: 300dpi source: ADF FRONT -x: 210 -y: 297
Epson	DS-410	mode: Gray resolution: 300dpi source: ADF Front -x: 210.0mm -y: 297.0mm
Epson	DS-530	mode: gray resolution: 300dpi -x: 210.0mm -y: 297.0mm
Epson	DS-530II	mode: gray resolution: 300dpi -x: 210.0mm -y: 297.0mm
Epson	DS-770	mode: Grayscale resolution: 300dpi scan-area: ISO/A4/Portrait -x: 210.0mm -y: 297.0mm
Epson	DS-770II	mode: Grayscale resolution: 300dpi source: ADF -x: 210.0mm -y: 297.0mm
Epson	DS-780N	mode: Grayscale resolution: 300dpi scan-area: Auto Detect
Epson	DS-860	mode: Gray resolution: 300dpi source: ADF Front -x: 210.0mm -y: 297.0mm
Epson	DS-870	mode: Grayscale resolution: 300dpi
Fujitsu	fi-6800dj	mode: gray resolution: 300dpi page-width: 210 page-height: 297 contrast: 80 brightness: 80
Fujitsu	fi-7030	mode: Color resolution: 300dpi source: ADF Front -x: 210 -y: 297
Fujitsu	fi-7160	mode: gray resolution: 300dpi source: ADF Front brightness: 20
Fujitsu	SP1120	mode: gray resolution: 300dpi source: adf-front page-auto: no
Fujitsu	SP1120N	mode: gray resolution: 300dpi source: adf-front page-auto: no -x: 210 -y: 297
Fujitsu	SP1125N	mode: gray resolution: 300dpi source: adf-front width: 210 height: 297
Fujitsu	SP1130N	mode: gray resolution: 300dpi source: ADF -x: 210 -y: 297

Памятка по расширенным настройкам сканирования в АРМ

Производитель	Модель	Параметры и значения
Hewlett-Packard (HP)	LaserJet Pro MFP 4103fdn	resolution: 300dpi source: ADF -x: 210 -y: 297
Hewlett-Packard (HP)	LaserJet MFP M227sdn	mode: gray resolution: 300dpi doc-source: ADF
Hewlett-Packard (HP)	LaserJet MFP M236sdn	mode: gray resolution: 300dpi source: Automatic Document Feeder
Hewlett-Packard (HP)	LaserJet MFP M426fdn	mode: gray resolution: 300dpi source: ADF -x: 210 -y: 297
Hewlett-Packard (HP)	LaserJet MFP M428fdn	mode: gray resolution: 300dpi source: ADF -x: 210 -y: 297
Hewlett-Packard (HP)	LaserJet Pro M428dw	mode: gray resolution: 300dpi source: ADF -x: 210 -y: 297
Hewlett-Packard (HP)	LaserJet Pro M428f	mode: gray resolution: 300dpi source: ADF -x: 210 -y: 297
Hewlett-Packard (HP)	LaserJet Pro M428f-M429f	mode: gray resolution: 300dpi source: ADF -x: 210 -y: 297
Hewlett-Packard (HP)	ScanJet Flow 5000 s4	mode: gray resolution: 300dpi source: ADF -x: 210 -y: 297
Hewlett-Packard (HP)	ScanJet Pro 2000 s2	mode: gray resolution: 300dpi -x: 210.0mm -y: 297.0mm
Hewlett-Packard (HP)	ScanJet Pro 3000 s3	mode: gray resolution: 300dpi -x: 210.0mm -y: 297.0mm
Hewlett-Packard (HP)	ScanJet Pro 3000 s4	mode: gray resolution: 300dpi source: ADF -x: 210.0mm -y: 297.0mm
KODAK	E1000	mode: Gray resolution: 300 source: ADF Front page-width: 210 page-height: 297

Производитель	Модель	Параметры и значения
Kyocera	ECOSYS M2040dn	mode: gray resolution: 300 source: ADF -x: 210 -y: 297
Kyocera	ECOSYS M2135dn	mode: gray resolution: 300dpi source: ADF -x: 210mm -y: 297mm
Kyocera	ECOSYS M2235dn	mode: gray resolution: 300dpi source: ADF -x: 210mm -y: 297mm
Kyocera	ECOSYS M2530dn	resolution: 300
Kyocera	ECOSYS M2540dn	mode: gray resolution: 300 source: ADF -x: 210 -y: 297
Kyocera	ECOSYS M2735dn	mode: gray resolution: 300 source: ADF -x: 210 -y: 297
Kyocera	ECOSYS M4125idn	mode: gray resolution: 300dpi source: ADF
Lexmark	MB2338adw	mode: 8-bit Grayscale resolution: 300dpi brightness: 3
Lexmark	MB2442adwe	mode: 8-bit Grayscale resolution: 300dpi brightness: 3
Lexmark	MX410de	mode: 8-bit Grayscale resolution: 300dpi source: ADF
Pantum	BM5100ADN	mode: gray resolution: 300dpi source: Automatic Document Feeder
Pantum	BM5100ADW	mode: gray resolution: 300dpi source: Automatic Document Feeder
Pantum	BM5100FDN	mode: Gray resolution: 300dpi source: Automatic Document Feeder -x: 210 -y: 297
Pantum	BM5100FDW	mode: gray resolution: 300dpi source: Automatic Document Feeder -x: 210 -y: 297

Памятка по расширенным настройкам сканирования в АРМ

Производитель	Модель	Параметры и значения
Pantum	CM1100ADN	mode: gray resolution: 300 source: ADF -x: 210 -y: 297
Pantum	M6500	mode: gray resolution: 300dpi source: ADF -x: 210 -y: 297
Pantum	M6550NW	mode: gray resolution: 300dpi source: Automatic Document Feeder
Pantum	M6550W	mode: gray resolution: 300dpi source: ADF -x: 215 -y: 300
Pantum	M6600NW	mode: Gray resolution: 300dpi source: ADF -x: 210 -y: 297
Pantum	M6800FDW	mode: gray resolution: 300dpi source: Automatic Document Feeder
Pantum	M7100DN	mode: Monochrome resolution: 300dpi source: Automatic Document Feeder -x: 210 -y: 297
Pantum	M7100DW	mode: gray resolution: 300dpi source: Automatic Document Feeder
Pantum	M7300FDW	mode: gray resolution: 300dpi source: Automatic Document Feeder -x: 210mm -y: 297mm

Производитель	Модель	Параметры и значения
Plustek	PS188	mode: gray resolution: 300dpi source: ADF Front paper-size: A4 auto-deskew: yes brightness: 40
Plustek	PT2160	mode: gray resolution: 300dpi source: ADF Front paper-size: A4 auto-deskew: yes brightness: 40
Samsung	K2200	mode: gray resolution: 300dpi doc-source: ADF Simplex
Xerox	B215	mode: Grayscale - 256 Levels resolution: 300dpi doc-source: ADF Simplex page-format: A4
Xerox	WorkCentre 3315	mode: Grayscale - 256 Levels resolution: 300dpi
Xerox	WorkCentre 3335	mode: gray resolution: 300 source: ADF -x: 210 -y: 297
Xerox	WorkCentre 3345	mode: gray resolution: 300 source: ADF
Катюша	M130	mode: Gray resolution: 300dpi source: ADF Front -x: 210 -y: 297
Катюша	M247	mode: Gray resolution: 300dpi source: Automatic Document Feeder Paper size: A4